

Korniche® ALUMINIUM ROOF LANTERN

SURVEYING GUIDE

- When specifying the dimensions of your lantern, you should provide the external dimensions of your upstand **and** the fitted water proof membrane

- We also recommend that you increase the size of the Lantern by 12mm in both length and width which will give you 6mm overhang all round

Example:


Upstand (inc Membrane):
1840 x 1220mm

Overhang:
12mm x 12mm

Roof Size:
1852 x 1232

- Upstand **must** be a minimum of 69mm wide (width of lantern eaves beam), level and square.

It is the responsibility of the installer to determine the finishing detail of the inside.

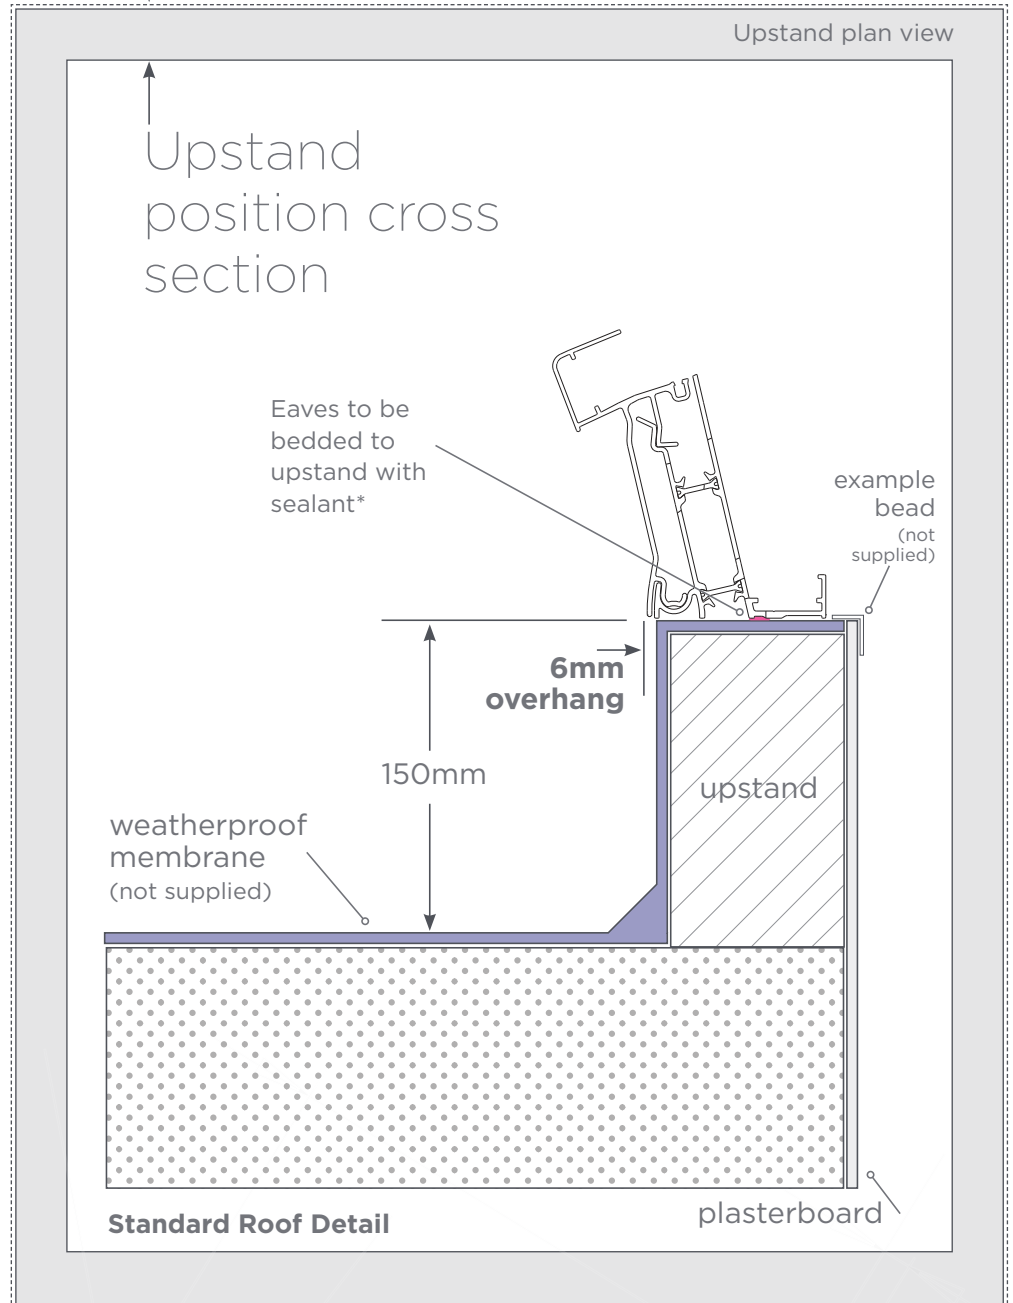

**Sealant to be applied to the underside of the eaves as per installation guide instructions only*

EXPRESS
WINDOWS
G R O U P L T D

E: info@expresswindowsgroup.co.uk
W: www.expresswindowsgroup.co.uk

T: +44 (0) 20 3475 9240

■ 24mm glazing

△ 25 degree fixed pitch