



AS-20 SLIMLINE SLIDING SYSTEM



FEATURES


- » Minimal interlocking section perfect for maximising light
- » Multipoint locking system for enhanced security
- » Designed to improve both strength and weather resistance
- » Semi dry glazing makes it easier for installation and glass replacement
- » Extensive choice of ironmongery
- » Available as an open corner solution
- » Two, three and four track options
- » Outstanding thermal efficiency
- » Available in flat pack for site assembly

APPLICATION

- Residential «
- Retail/commercial «
- Hospitality «

Technical Performance

| | |
|----------------|--|
| Finish | Marine quality polyester powder coat as standard* |
| U Value | 1.6 W/m ² K (When using a 1.0 W/m ² K centre pane) |
| Air | Class 3, 600Pa |
| Water | Class 7a, 300Pa |
| Wind | Class AE, 2400Pa |



U Value
1.6W/m²k



Water
300Pa



Interlock
20mm



Wind
2400Pa



Max Sash Wt
250kg







Air
600Pa



Max Height
2500mm

2 TRACK CROSS SECTION

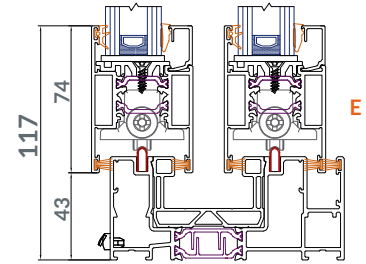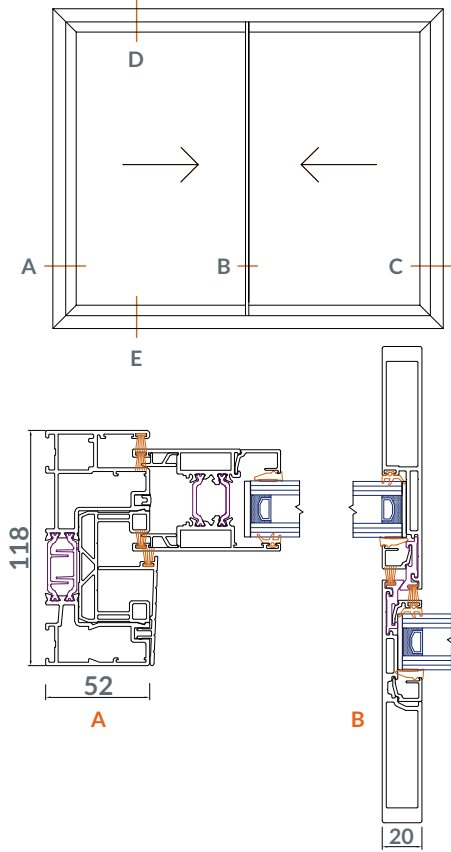

3 TRACK CROSS SECTION

